

## LandStar series

LS1024/LS1524/LS2024

Application:

Solar home System, rural electrification system, CCTV etc.

Load work mode: manual ON/OFF

- Intelligent System Optimum Control
- High efficient Series PWM charging with temperature compensation
- Compact size
- Use MOSFET as electronic switch, without any mechanical switch
- Digital LED menu, only one key choose the battery type
- Load status display
- Gel, Sealed and Flooded battery type option
- Big terminals and big distance between terminals (10A/6 mm<sup>2</sup>, 15A, 20A/10 mm<sup>2</sup>)
- 
- Reverse polarity protection: Any combination of solar module and battery


Model	LS1024	LS1524	LS2024
Rated Current	10A	15A	20A
System Voltage	12/24V auto work		
Over Load Protection	1.25 times of rated current for 60 seconds, or 1.5 times for 5 seconds		
Short Circuit Protection	3.5 times of rated current		
Self-consumption	Max.6mA		
Working Temperature	-35°C to +55°C industrial		
Equalize Charging Voltage	14.6V;x2/24V		
Boost Charging Voltage	14.4V;x2/24V		
Float Charging Voltage	13.8V;x2/24V		
Boost Reconnect Charging Voltage	13.2V;x2/24V		
Temperature Compensation	-30mV/°C/12V		
Under Voltage Warning Voltage	12.0V;x2/24V		
Low Voltage Disconnect Voltage	11.1V;x2/24V		
Low Voltage Reconnect Voltage	12.6V;x2/24V		
Terminals	6 mm <sup>2</sup>	10 mm <sup>2</sup>	10mm <sup>2</sup>
Enclosure	IP30		

Technical data for lead acid battery at 25°C

# LandStar Solar Controller

Model : LS2024

## Product details

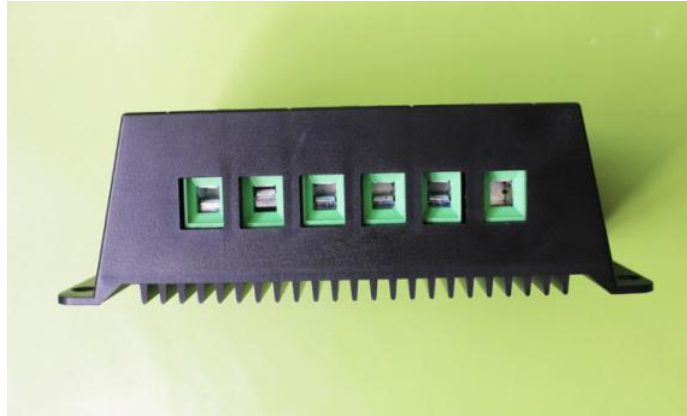

Sealed, Gel, Flooded