




### Features

- 1) High Efficiency
- 2) 12V DC standard output
- 3) CE, TUV junction box
- 4) Lifetime: 25 years
- 5) Warranty: 2 years
- 6) 90% power 10 years
- 7) 80% power 20 years

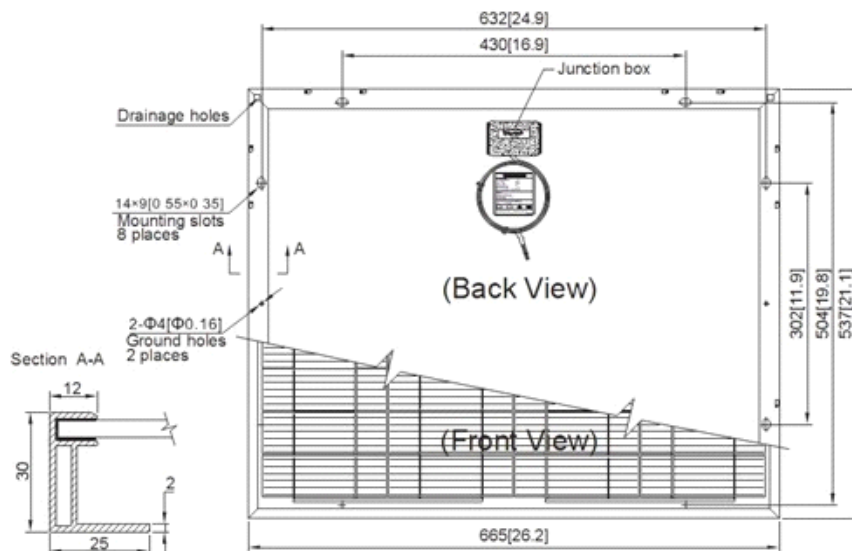

**Specification:**

|                                 |  |
|---------------------------------|--|
| Model                           | SSB10W-12  |
| Nominal power Pm                | 10 Watt  |
| Power allowance                 | ±10%   |
| Optimized working voltage Vm    | 17.49V   |
| Optimized working current Im    | 0.57A  |
| Open circuit voltage Voc        | 21.67V   |
| Short circuit current Isc       | 0.61A  |
| Module efficiency               | 13.69%   |
| Withstanding voltage            | DC715V   |
| Dimension of module (mm)        | 360*300*28   |
| Net weight (kg)                 | 1.5  |
| Packing (pcs/carton)            | 20   |
| Dimension of package (mm)       | Package of inside 320*382*28<br>Package of outside 334*620*397 |
| Volume (m3)                     | 0.077  |
| Gross weight (kg/ carton)       | 35   |
| Dimension of pallet (mm)        | 1200*800*1825  |
| Quantity in a 20' container     | 20carton/ pallet*8 pallet =160 carton (3200pcs)                |
| Time returnable and replaceable | 2 year   |
| Power attenuation               | 10year≤10%20 year≤20%  |