



Polycrystalline Solar Panel

Model No:SSB140W-12

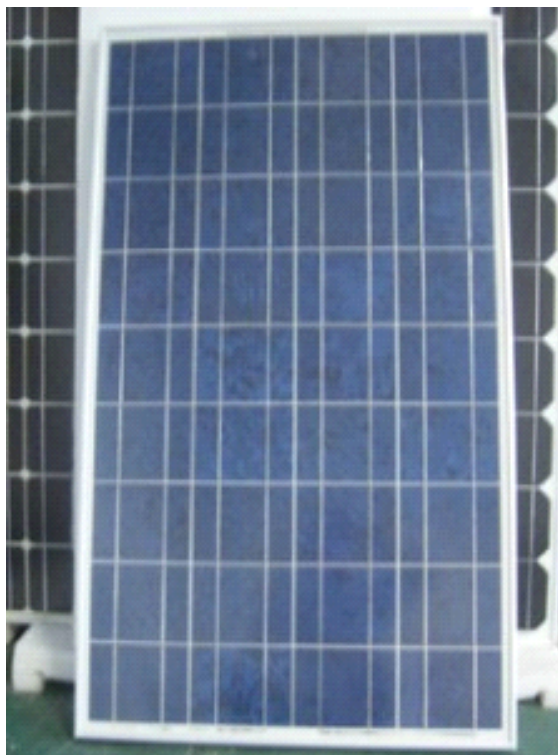

Features

- 1) High Efficiency
- 2) 12V DC standard output
- 3) CE,TUV junction box
- 4) Lifetime:25 years
- 5) Warranty:2 years
- 6) 90% power 10 years
- 7) 80% power 20 years

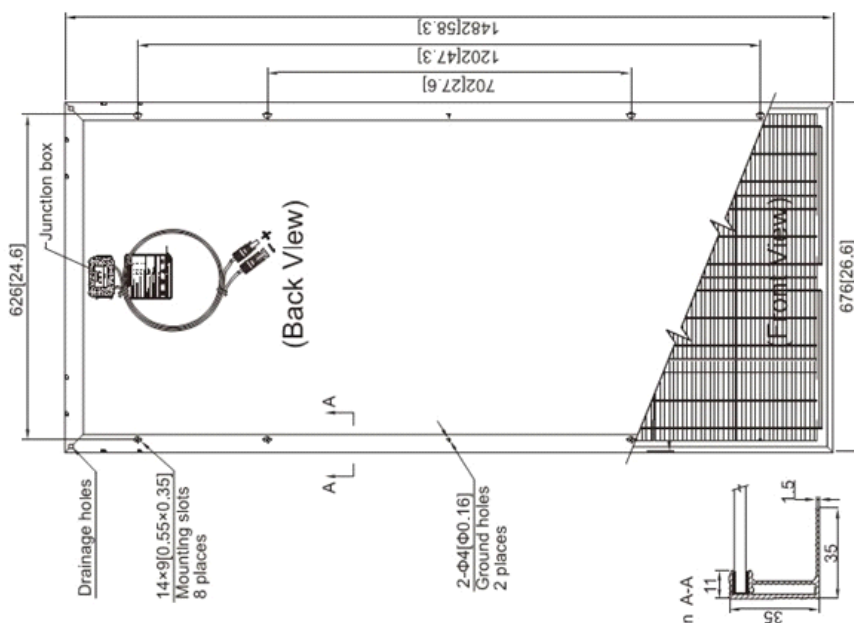

Specification:

| | |
|-------------------------------|---|
| Model | SSB140W-12 |
| Nominal power Pm | 140 Watt |
| Power allowance | ±5% |
| Optimized working voltage Vm | 17.5V |
| Optimized working current Im | 8.0A |
| Open circuit voltage Voc | 22.2V |
| Short circuit current Isc | 8.06A |
| Module efficiency | 14% |
| Withstanding voltage | 1000 |
| Dimension of module (mm) | 1482×676×35 |
| Net weight (kg) | 11.5 |
| Packing (pcs/carton) | 2 |
| Dimension of package (mm) | 1532×720×100 |
| Volume (m3) | 0.11 |
| Gross weight (kg/ carton) | 26 |
| Dimension of pallet (mm) | 1562×964×1950 |
| Quantity in a 40' container | 22carton/pallet×14 pallet =308carton (616pcs) |
| Time returnable & replaceable | 2 year |
| Power attenuation | 10year≤10%20 year≤20% |