


# Polycrystalline Solar Panel

# Model No:SSB40W-12



## Features

- 1) High Efficiency
- 2) 12V DC standard output
- 3) CE, TUV junction box
- 4) Lifetime: 25 years
- 5) Warranty: 2 years
- 6) 90% power 10 years
- 7) 80% power 20 years

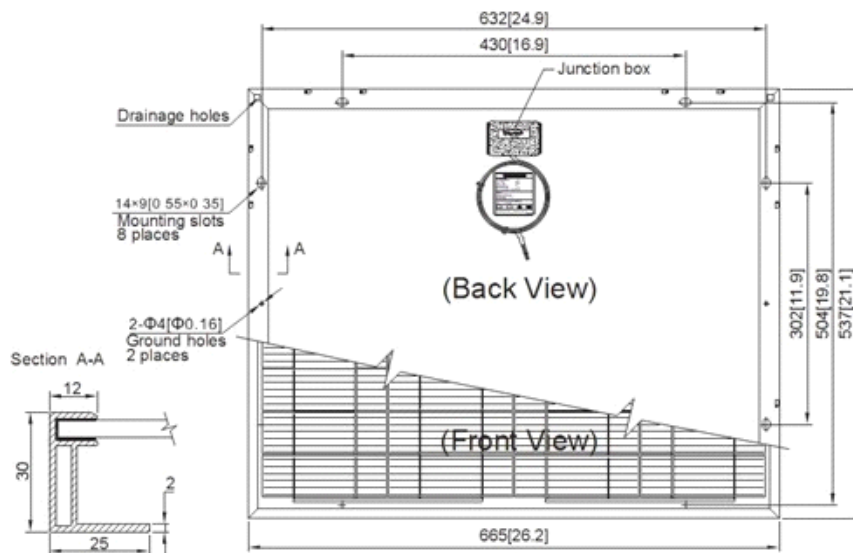

**Specification:**

Model	SSB40W-12
Nominal power Pm	40 Watt
Power allowance	±10%
Optimized working voltage Vm	17.49V
Optimized working current Im	2.28A
Open circuit voltage Voc	21.67V
Short circuit current Isc	2.44A
Module efficiency	13.69%
Withstanding voltage	DC715V
Dimension of module (mm)	668*545*35
Net weight (kg)	4.3
Packing (pcs/carton)	20
Dimension of package (mm)	Package of inside 320*382*28 Package of outside 334*620*397
Volume (m3)	0.077
Gross weight (kg/ carton)	35
Dimension of pallet (mm)	1200*800*1825
Quantity in a 20' container	20carton/ pallet×8 pallet =160 carton (3200pcs)
Time returnable and replaceable	2 year
Power attenuation	10year≤10%20 year≤20%