


Polycrystalline Solar Panel

Model No:SSB55W-12



Features

- 1) High Efficiency
- 2) 12V DC standard output
- 3) CE, TUV junction box
- 4) Lifetime: 25 years
- 5) Warranty: 2 years
- 6) 90% power 10 years
- 7) 80% power 20 years

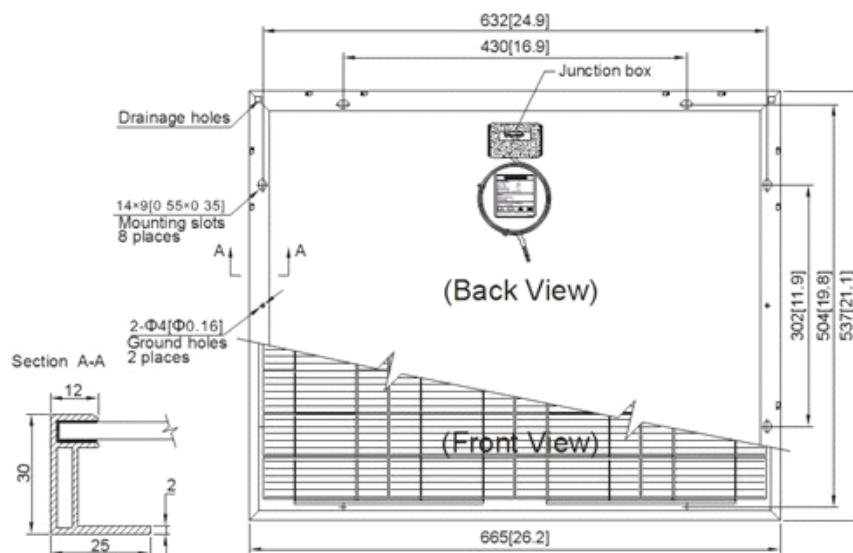

Specification:

| | |
|---------------------------------|--|
| Model | SSB55W-12 |
| Nominal power Pm | 55 Watt |
| Power allowance | ±10% |
| Optimized working voltage Vm | 18.14V |
| Optimized working current Im | 3.04A |
| Open circuit voltage Voc | 21.81V |
| Short circuit current Isc | 3.24A |
| Module efficiency | 15.50% |
| Withstanding voltage | 715 |
| Dimension of module (mm) | 655×668×35 |
| Net weight (kg) | 6.3 |
| Packing (pcs/carton) | 2 |
| Dimension of package (mm) | 821×709×90 |
| Volume (m3) | 0.06 |
| Gross weight (kg/ carton) | 15 |
| Dimension of pallet (mm) | 850×950×1950 |
| Quantity in a 20' container | 24carton/pallet×12pallet =288carton (576pcs) |
| Time returnable and replaceable | 2 year |
| Power attenuation | 10year≤10%20 year≤20% |