


Monocrystalline Solar Panel

Model :SSA225W-27MD

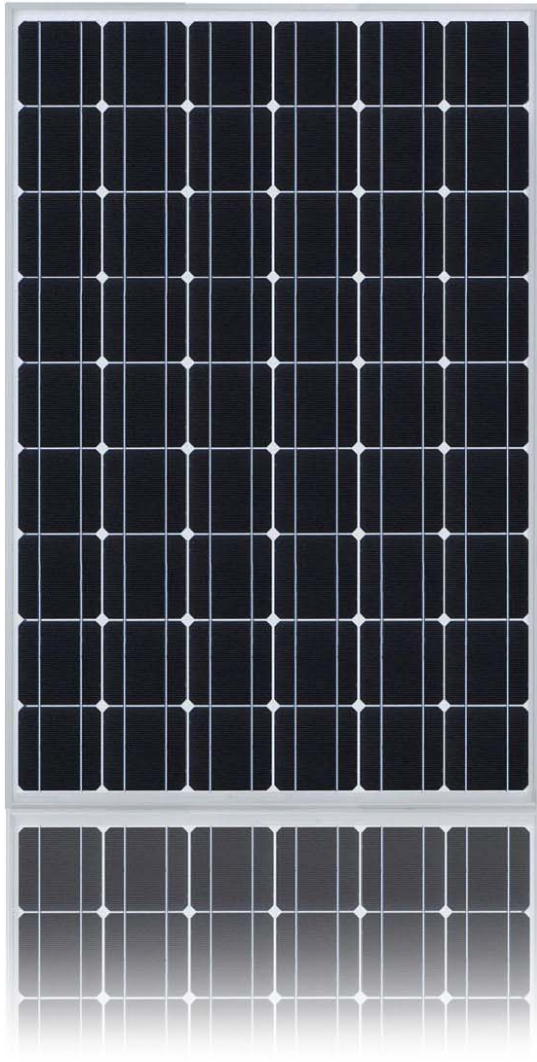

Applications

- ☐ On-grid residential roof-tops
- ☐ On-grid commercial/industrial roof-tops
- ☐ Solar power stations
- ☐ Other on-grid applications

Electrical Data

Maximum Power(W)	225W
Optimum Power Voltage(Vmp)	28.49V
Optimum Operating Current(Imp)	7.90A
Open Circuit Voltage(Voc)	33.63V
Short Circuit Current(Isc)	8.45A
Cell Efficiency (%)	17.44%
Module Efficiency (%)	15.30%
Tolerance Wattage(e.g. +/-3%)	±3%
NOCT	47°C +/-2°C

Benefits

- ☐ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- ☐ Bypass diode minimizes the power drop caused by shade;
- ☐ Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- ☐ Modules independently tested to ensure conformance with certification and regulatory standards;
- ☐ Manufacturing facility certified to ISO 9001 quality management system standards.

Temperature Coefficients

Temperature Coefficients of Isc(%)°C	+0.04
Temperature Coefficients of Voc(%)°C	-0.38
Temperature Coefficients of Pm(%)°C	-0.47
Temperature Coefficients of Im(%)°C	+0.04
Temperature Coefficients of Vm(%)°C	-0.38



