



## Electrical Data

Maximum Power(W)	210W
Optimum Power Voltage(Vmp)	46.65V
Optimum Operating Current(Imp)	4.5A
Open Circuit Voltage(Voc)	58.41V
Short Circuit Current(Isc)	4.81A
Cell Efficiency (%)	14.84%
Module Efficiency (%)	12.50%
Tolerance Wattage(e.g.+/-3%)	±3%
NOCT	47°C +/-2°C

## Benefits

- ❑ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- ❑ Bypass diode minimizes the power drop caused by shade;
- ❑ Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- ❑ Modules independently tested to ensure conformance with certification and regulatory standards;
- ❑ Manufacturing facility certified to ISO 9001 quality management system standards.

## Temperature Coefficients

Temperature Coefficients of Isc(%)/°C	+0.04
Temperature Coefficients of Voc(%)/°C	-0.38
Temperature Coefficients of Pm(%)/°C	-0.47
Temperature Coefficients of Im(%)/°C	+0.04
Temperature Coefficients of Vm(%)/°C	-0.38

## Applications

- ❑ On-grid residential roof-tops
- ❑ On-grid commercial/industrial roof-tops
- ❑ Solar power stations
- ❑ Other on-grid applications


# Monocrystalline Solar Panel

# Model :SSA210W-48M

## Components & Mechanical Data

Solar Cell	125*125 Mono
Number of Cell(pcs)	8*12
Size of Module(mm)	1600*1056*40
Front Glass Thickness(mm)	3.2
Surface Maximum Load Capacity	2400Pa
Allowable Hail Load	23m/s ,7.53g
Weight Per Piece(KG)	19.5
Junction Box Type	Pass the TUV Certificate
Bypass Diode Rating(A)	12
Cable & Connector Type	Pass the TUV Certificate
Frame(Material Corners,etc.)	40#
Backing (Brand Type)	TPT
Temperature Range	-40°C to +85°C
FF (%)	70-76%
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25 +/-2°C


## I-V Curves

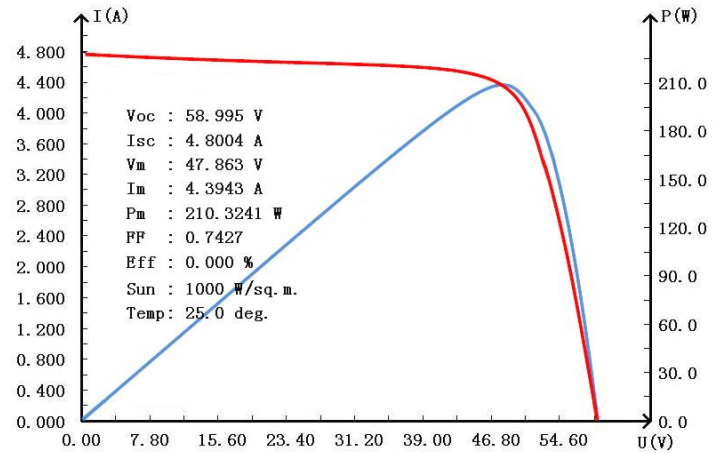

## Warranty & Certifications

Warranty	25 year limited power warranty
	10 year limited product warranty
Certifications	IEC 61215, IEC 61730

## Engineering Drawings

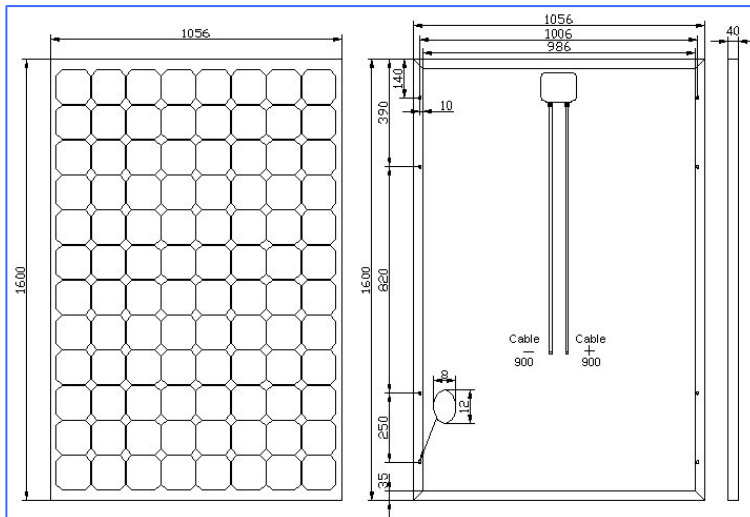

## Packing

Packing	Wooden box
1*20'	14Pallets/330pcs
1*40'HQ	32Pallets/756pcs

